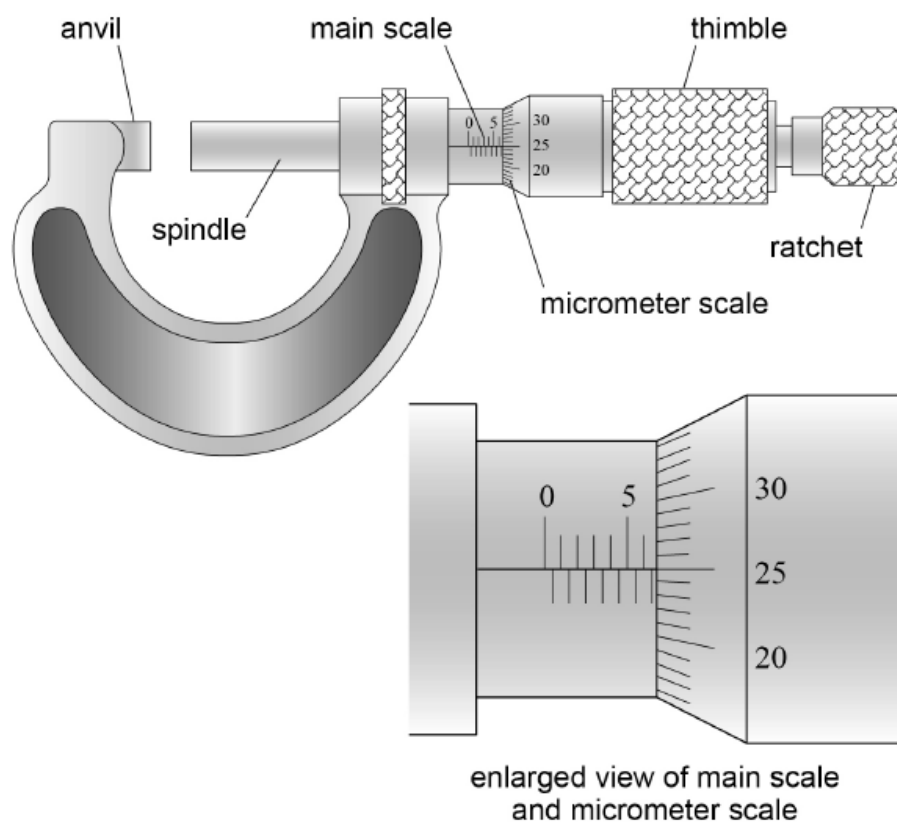


Measurements and their errors – AS Physics

1. No.1

0 1 . 1

Figure 1 shows a micrometer screw gauge.

Figure 1

What is the reading on the micrometer?

Tick (✓) **one** box.**[1 mark]**

6.25

☐

6.75

☐

7.25

☐

8.25

☐

0 1 . 2

A metal wire of diameter d is held in the gap between the anvil and the spindle. Just before the reading of d is taken, the gap is closed using the ratchet and not the thimble.

Explain why the gap is closed in this way.

[1 mark]

0 1 . 3

The mass per unit length μ of the metal wire is given by

$$\mu = \frac{\pi \rho d^2}{4}$$

where ρ is the density of the metal.

Values of d and μ are used to calculate ρ .

The percentage uncertainty in d is 1.2%.

The percentage uncertainty in μ is 2.0%.


Calculate the percentage uncertainty in the result for ρ .

[2 marks]

percentage uncertainty = _____ %

Figure 2 shows apparatus used to investigate how the frequency of stationary waves on a wire depends on its diameter d .

Figure 2

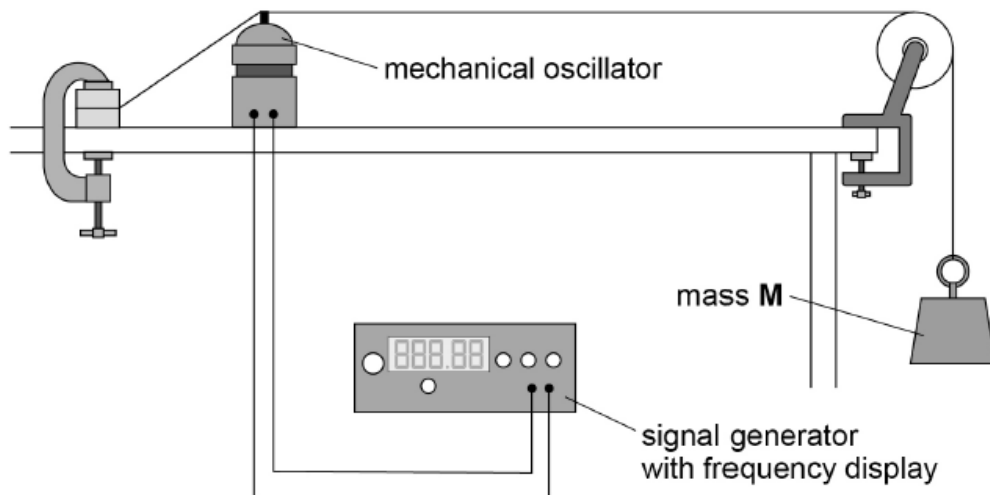

When the signal generator is switched on, the horizontal part of the wire oscillates.

A student changes the frequency until the first-harmonic stationary wave is produced. The student records the frequency f of the first harmonic and then turns off the signal generator.

She removes the wire and measures d using a micrometer.

She then repeats the experiment for wires of different diameter.

0 1 . 4

The wires used in the experiment are made of the same metal so that ρ is a control variable.

State **two** other control variables in the experiment.


[2 marks]

1 _____

2 _____

Figure 3 is a plot of the experimental data.

Figure 3

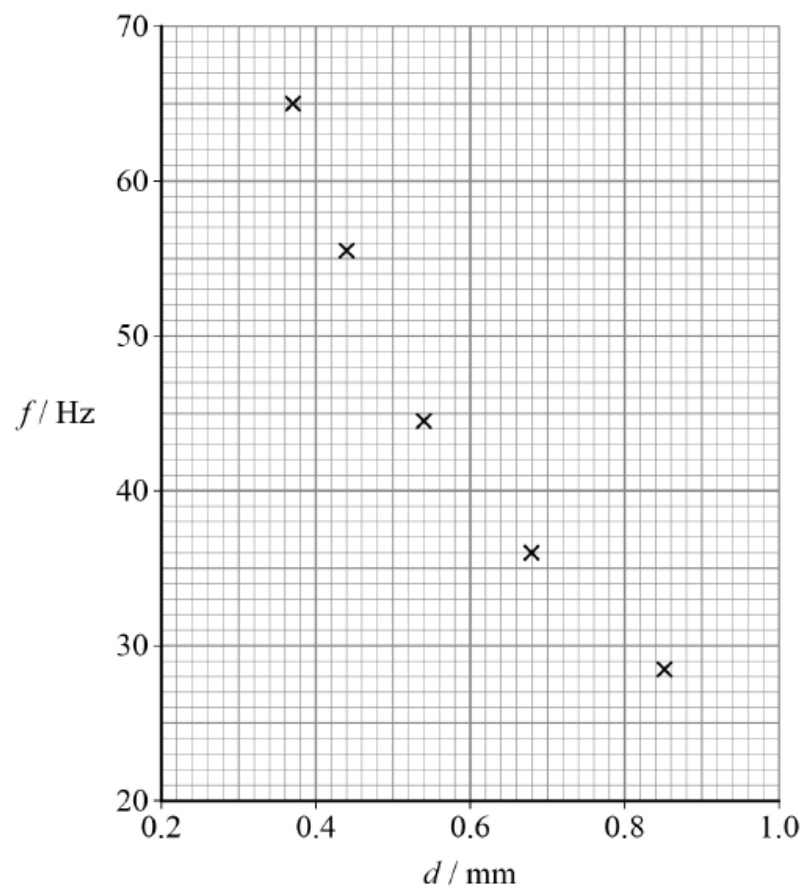

0 1 . 5 The student suggests that $f \propto \frac{1}{d}$.

Deduce, using data points from **Figure 3**, whether this suggestion is correct.

[2 marks]

0 1 . 6 Another student repeats the experiment with the mass of **M** doubled.

Explain how this student's plotted data compare with **Figure 3**.


[2 marks]

2. No.2

0 2

Figure 4 shows an arrangement used to investigate projectile motion of a ball.

Figure 4

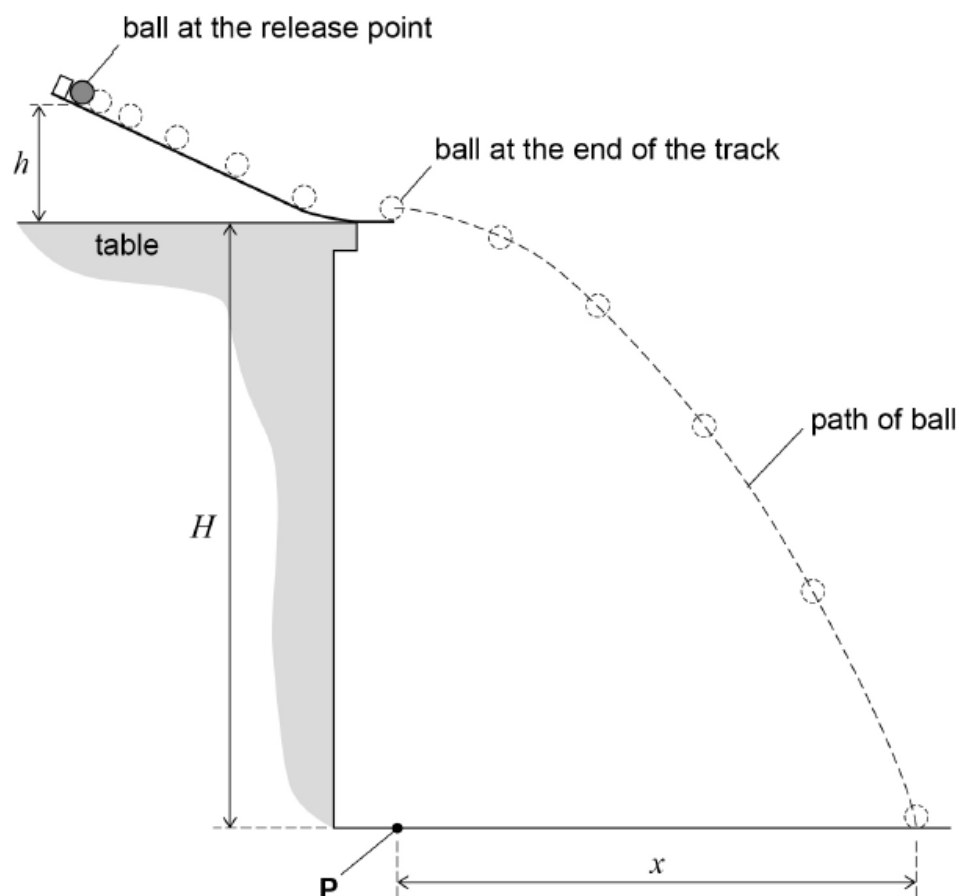

The ball is placed on the track at the release point.

The ball is released from rest from a vertical distance h above the table.

When the ball reaches the end of the track, it is a vertical distance H above the horizontal floor.

The ball leaves the track horizontally and lands on the floor at a horizontal distance x from the end of the track.

0 2 . 1

To measure x a student must locate a point P on the floor vertically below the end of the track.

Describe a procedure to locate P .

You may add detail to Figure 4 to illustrate your answer.

[1 mark]

0 2 . 2


A ruler, graduated in mm, is used to determine x .

The student places the ruler on the floor with the zero graduation aligned with **P**.

The student determines x when the ball is released six times at a particular value of h . He makes marks on the floor where the ball lands.

Figure 5 shows circles that indicate these marks.

Figure 5

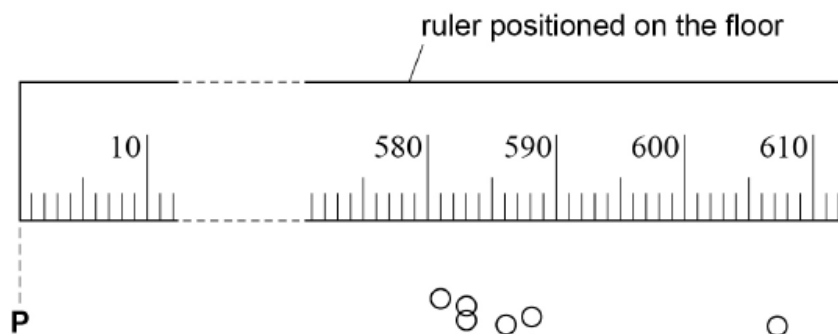

Determine x for this value of h .


[3 marks]

$x =$ _____ mm

0 2 . 3

The student obtains values of x corresponding to other values of h .
Figure 6 shows his results.

Figure 6

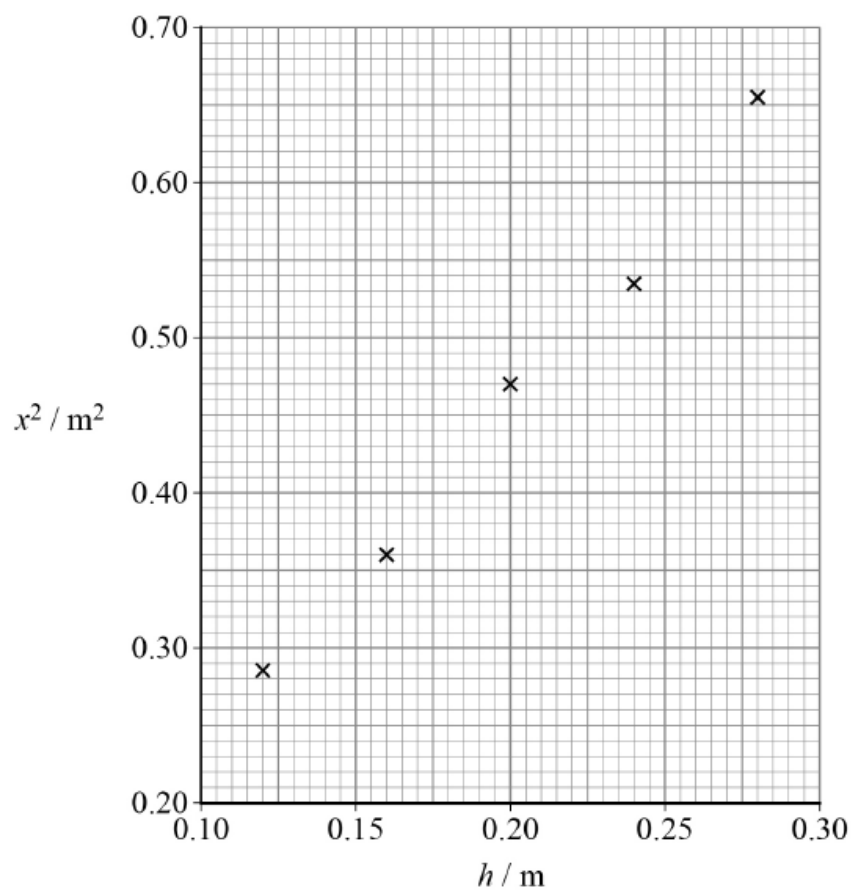

It can be shown that $\frac{x^2}{H} = \frac{20}{7}h$


Determine H .

[3 marks]

$H =$ _____ m

In a different arrangement, the ball is released from rest and then continues to roll at a constant velocity across a horizontal table, as shown in **Figure 7**.

Figure 7

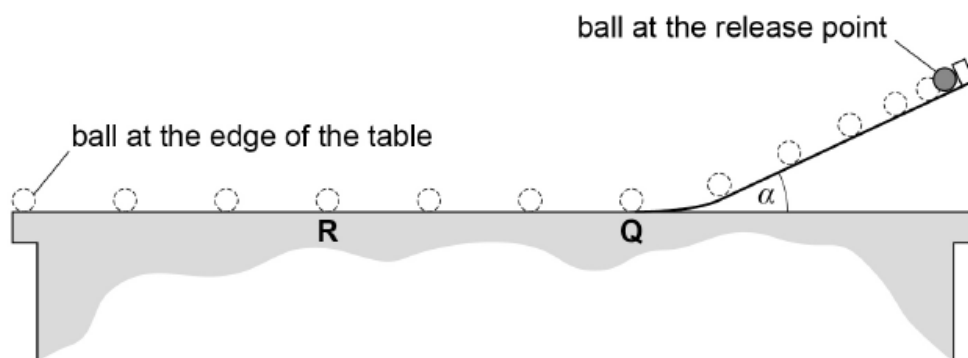

The bottom of the track is fixed to the table at point **Q**.

The angle between the straight part of the track and the table is α .

A marker is placed at **R**, a point midway between **Q** and the edge of the table.

The student uses a stopwatch to measure the time t for the ball to roll from **Q** to **R**.


0 2 . 4

Explain why increasing the distance **QR** will reduce the percentage uncertainty in t .

[1 mark]

0 2 . 5 Figure 8 shows values of t for different values of α .

Figure 8

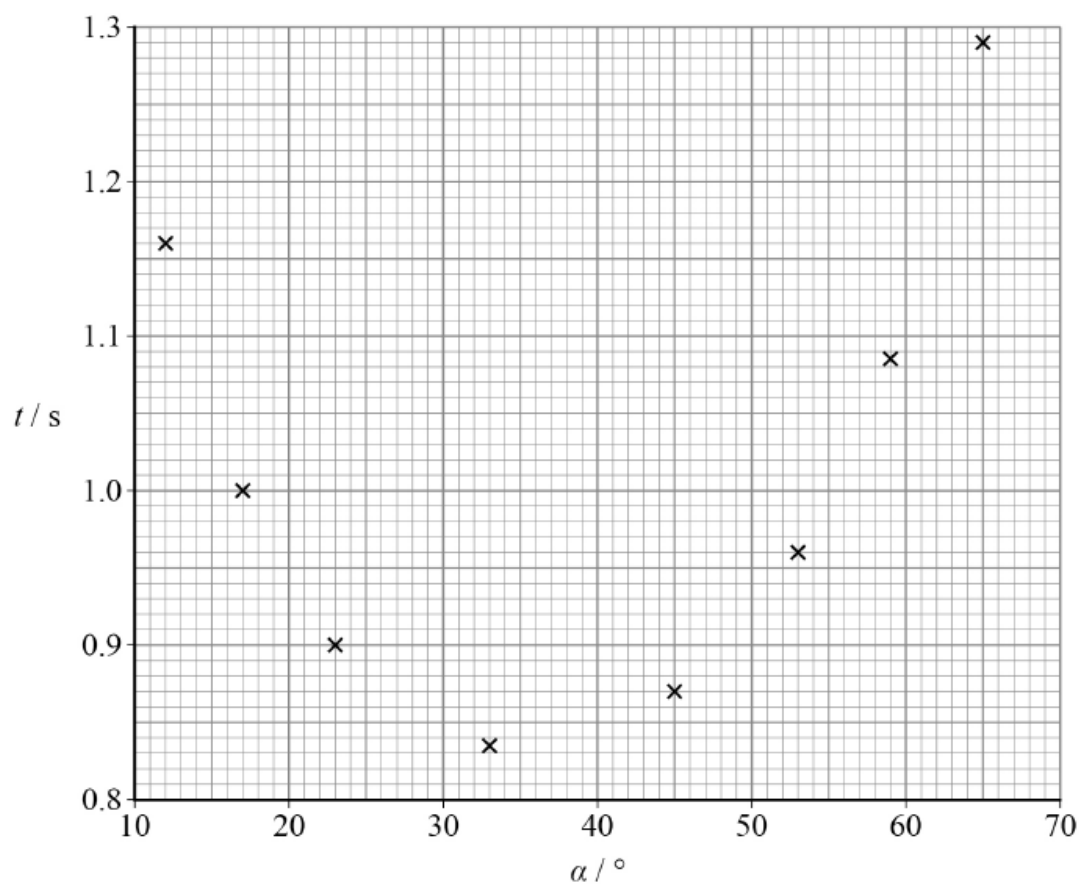

At a particular value of α the ball rolls from **Q** to **R** at its maximum velocity.

Explain how the student should use **Figure 8** to determine this value of α .

Go on to suggest what further readings should be taken to reduce the uncertainty in this value of α .

[2 marks]
